

LANCER®

LEV® VALVE 4.5



Push Button



Portion Control



Crew-Serve



Sure-Fill®



Self-Serve

The LEV® is built with the highest quality materials and proven technology to provide our customers with consistent drink quality and reliability.

- Coca-Cola's valve of choice
- Over 6 million valves have been built since 1987
- Consistent "Best in Class" performance
- Lowest "Life Cost" of operation available
- Simple design gives high reliability
- Widest range of ratio control (2:1 - 10:1)



LANCER®

LEV® Valve 4.5



Bare Valve



Nozzle Assembly




Syrup Separator Nozzle



Front Water Lever

S P E C I F I C A T I O N S

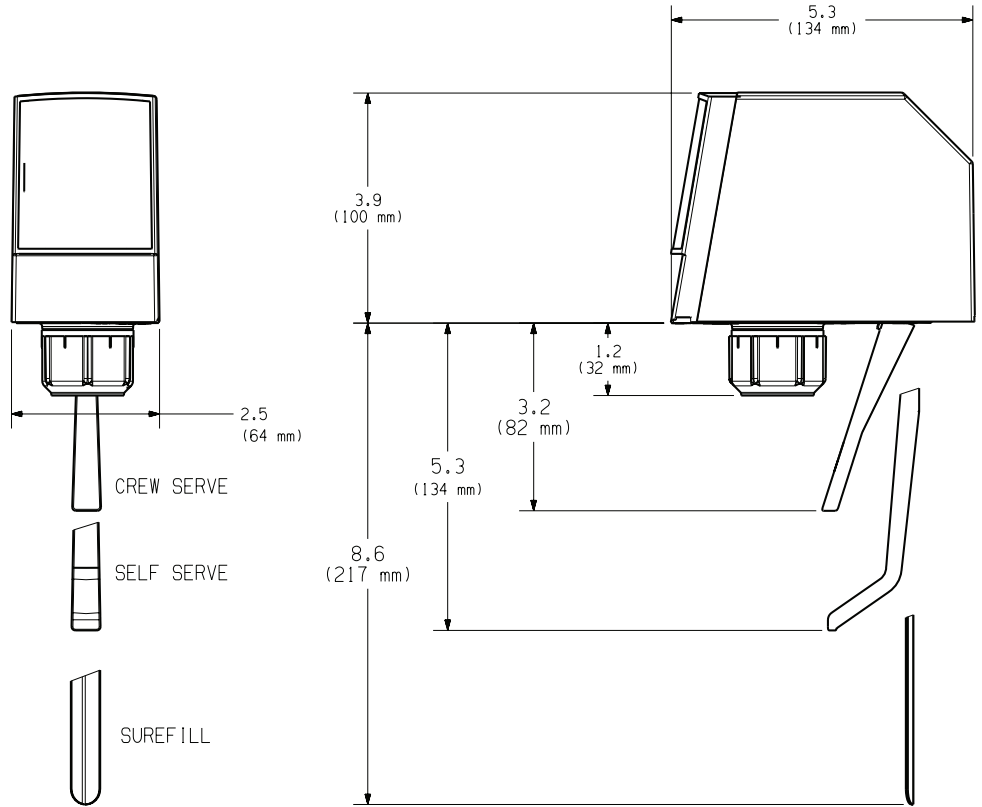

PRESSURE REQUIREMENTS (FLOWING PRESSURE)

Water: 40 - 110 psig (2.8 - 7.7 bar)
 Syrup (Sugar): 20 - 70 psig (1.4 - 4.9 bar)
 Syrup (Diet/Light): 10 - 70 psig (0.7 - 4.9 bar)

DRINK FLOW RATES

2.5 oz/s - 4.5 o/s (88.8 ml/s - 133.2 ml/s)

RATIO ADJUSTMENT RANGE

2.0 - 10.0 Water/Syrup by Volume
(dependent on finished drink flow rate)

ELECTRICAL REQUIREMENTS

24 VAC, 50/60 Hz

MOUNTING

Uses LEV® Mounting Block -
 LEV® mounting block has the same mounting
 screw hole pattern as the following:
 Dole SEV
 Dole FFV
 Cornelius UF1, SF1
 McCann Turbo Flo Jr.

Warranty: For warranty specifics by product, contact your Lancer Sales Representatives.

Equipment design and/or specifications may change without notice.

CORPORATE OFFICE 6655 Lancer Blvd • San Antonio, TX 78219
 210-310-7000 • 1-800-729-1500 • FAX 210-310-7250 • www.lancercorp.com

"Lancer" is the registered trademark of Lancer Corporation © 2011 Lancer, all rights reserved.

LEVValve-4.5_SS 06/11