

MD-150 • MD-200 • MD-250 Countertop Ice/Beverage Dispensers



Servend.



MD-150-6PL F 424



MD-250-10 PB F424



Servend's
Flexible
Beverage
Manifold

- MD-Series patented paddlewheel ice dispenser technology maximizes counter space.
- Servend's patented Rocking Chute ice dispense reduces in-flight ice and ice spillage.
- Simple, non-electrical design has a convenient on-site push lever conversion.
- Maximum carb and non-carb flexibility with enhanced "hard-plumbed" beverage cooling. Ambient-capable syrup line is great for juice, tea or other beverages that require ambient syrup.
- Warranty
Dispenser: 2-year limited parts and 1-year limited labor.
Flomatic Valve: 2-year parts only.
- Accessible front bin extension for manual ice filling even when top-mounted with automatic-fill Manitowoc ice cube machine.
- Quick, easy to install beverage valves, coldplate hook-ups, drain connections and electrical components are all front serviceable.
- Choose 22" (55.9 cm) and 30" (76.2 cm) wide models; 150, 200, and 250 pound ice storage capacity; up to 6 Flomatic 424 valves on 22" (55.9 cm) wide model or 8 to 10 valves on 30" models.
- Flex manifold makes carbonated or non-carbonated flavor changes possible in minutes. Great for seasonal promotions!
- Durable stainless steel constructed interior bin, bin liner and exterior cabinet.



ISO 9001:2000
Quality System Certified

Leader in Ice & Beverage Dispensers


Countertop Ice/Bev • Drop-in • Countertop Electric • Undercounter

Manitowoc
Foodservice Group

MD-150 • MD-200 • MD-250 Countertop Ice/Beverage Dispensers

Specifications

	MD-150	MD-200	MD-250
Standard Features	Flomatic 424 Push Button or Sanitary Lever, lighted merchandiser, Quench graphics, key switch, leg kit. Timed agitation is standard on MD-200 and MD-250 units		
Dimensions	22" W x 31" D x 33.25" H 55.9 W x 78.7 D x 84.5 H (cm)	30" W x 31" D x 33.25" H 76.2 W x 78.7 D x 84.5 H (cm)	30" W x 31" D x 39.25" H 76.2 W x 78.7 D x 99.7 H (cm)
Shipping Weights	240 lbs. / 109 kgs.	300 lbs. / 136.3 kgs.	325 lbs. / 147.7 kgs.
Countertop Weight (w/o ice)	197 lbs. / 90 kgs.	260 lbs. / 118 kgs.	280 lbs. / 127 kgs.
Ice Storage Capacity	Up to 150 lbs./68 kgs.	Up to 200 lbs./91 kgs.	Up to 250 lbs./114 kgs.
Electrical Requirements	120/60/1 Call Factory for other options		
Drain	Single pre-installed 3/4" (1.91 cm) PVC (N.P.T.) drain fitting extends from the drain pan. Ice bin drains directly into drain pan, no hook-up necessary		
Valves	6 Flomatic 424	8 or 10 Flomatic 424	
Ice Machine Compatibility	Manual fill or top mount with Manitowoc or compatible 22" (55.9 cm) or 30" (76.2 cm) ice machine		
Graphic Area Dimensions	Physical trim - 21.5" W x 10.5" H 54.61 W x 26.67 H (cm) Visual area - 20.5" W x 9.5" H 52.07 W x 24.13 H (cm)	Physical trim - 29.312" W x 10.625" H 74.45 W x 26.99 H (cm) Visual area - 28.312" W x 9.625" H 71.91 W x 24.45 H (cm)	Physical trim - 29.5" W x 16.625" H 74.93 W x 42.23 H (cm) Visual area - 28.5" W x 15.625" H 72.39 W x 39.69 H (cm)
Manifold	2-1-1-2 Flexible left to right	8 Valve 2-1-1-1-3 Flexible left to right / 10 Valve 3-1-2-1-3 Flexible left to right	
Options	Standard, fast flow, push button, sanitary lever, automatic fill lever or portion control beverage valves. Premix beverage valves available for MD-150 only. Low ice indicator, side splash guards, timed agitation, water dispenser. Leg kit not recommended for top-mounted ice machine applications.		

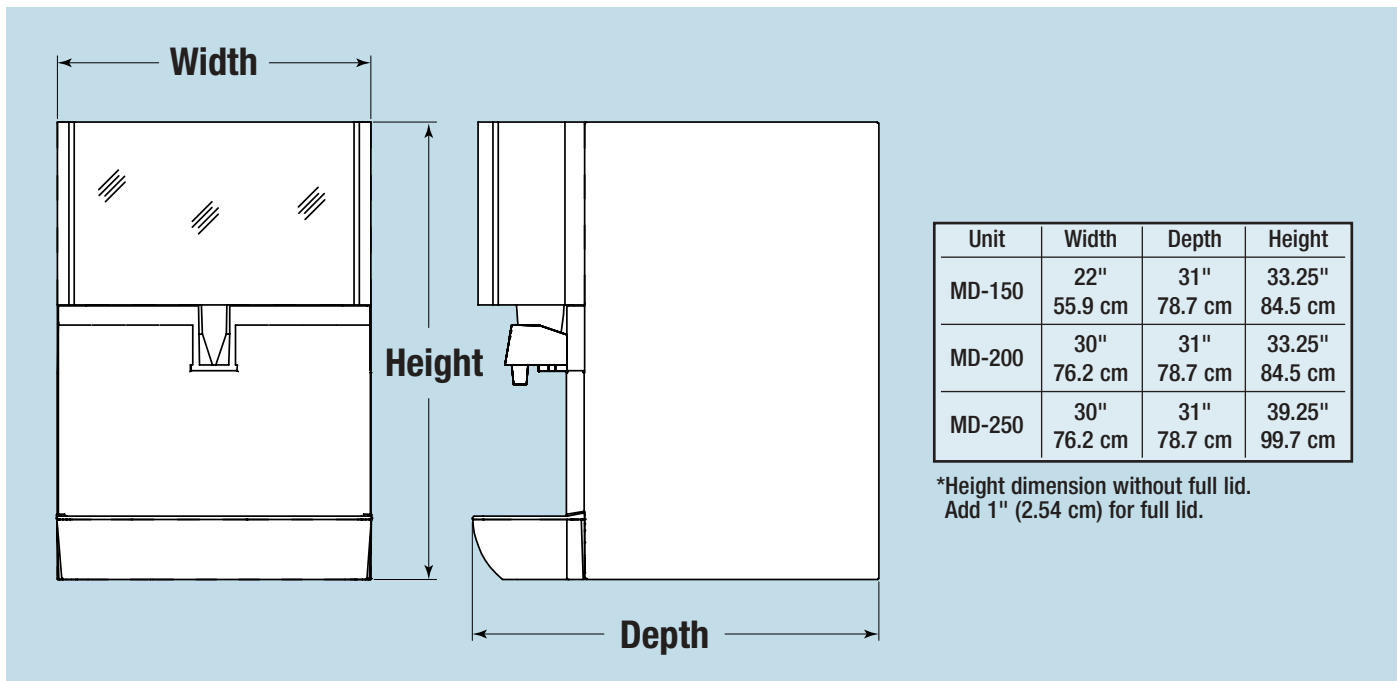

©2004 Servend 1/04 Continuing product improvement may necessitate change of specifications without notice. 2691



MANITOWOC BEVERAGE
EQUIPMENT, INC.
2100 Future Drive
Sellersburg, IN 47172, USA
Ph: 812-246-7000 • Fax: 812-246-7024
Visit us online at www.manitowocbeverage.com

